




Connecto | Channel width 130 with galvanized steel mech grating class B125

Code : CAB10BC



■ FUNCTION :

- To drain rainwater, among others. In accordance with the EN1433 standard and the **CE** marking, it can be used on private domains for all B125 load class applications in parks, gardens, buildings and housing surroundings.

- This model is designed to fit in a separate screed or a concrete slab. It is compact, with a height limited to 60mm overall.

■ DESCRIPTION :

-This channel is very light to make its fitting easier. It is equipped with an interlocking system, enabling it to be straight so as to keep an even trickle of water. It is watertight when sealed.

-The one-metre-long and 130mm-wide PVC body of the channel has an interlocking edge to be glued.

■ ACCESSORIES :

- Ø 40 end or side cap / outlet – **NAH773**
- Ø 100 vertical outlet – **STCAN**
- Ø 110 vertical outlet – **SVCAN**



NAH 773




STCAN
SVCAN

■ CHARACTERISTICS :

- Length: 1 m
- Effective width: 98 mm
- Effective depth: 34 mm
- Opening dimension : 15 x 30 mm
- Drainage surface: 830 cm²/ml
- Poids: 3.841 Kg

■ IMPLEMENTATION :

- X = 60 mm, L = 250 mm
- y = 65 mm, Z = 100 mm

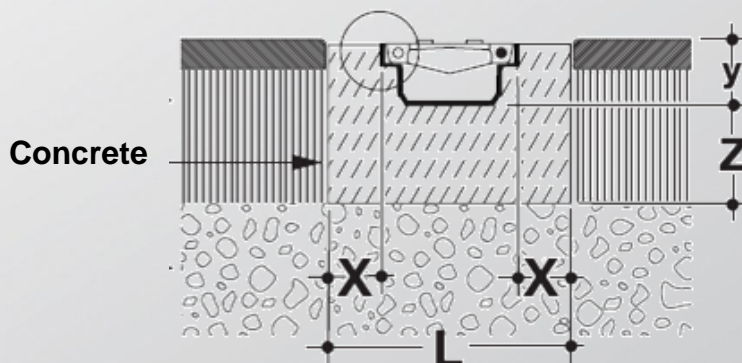

■ QUALITY - ENVIRONMENT :

ISO 9001
ISO 14001
BUREAU VERITAS
Certification



DECEMBER 2014