


Connecto Shallow channel with slotted stainless steel grating

Codes : CAB10API

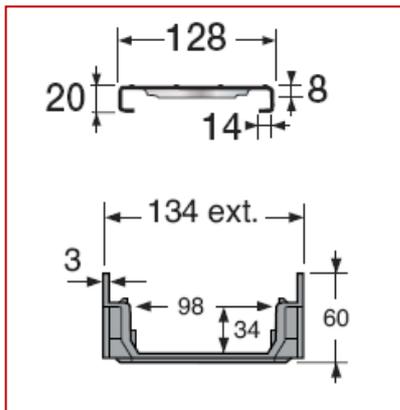

FUNCTION :

The drainage channel is designed to evacuation run-off water. In accordance with the EN1433 standard and the **CE** marking, it can be used in private area for all building applications, the environment of home, parks and gardens in class A15

DESCRIPTION :

This drainage channel is one-meter-long. It consists of:

- a one-meter-long PVC body with a male/female interlocking joint system
- a one-meter long slotted stainless steel AISI 304 grating

Optional: possibility of stainless steel AISI 304 edges (ref CABI10API)



ACCESSORIES :

- Ø 40 End cap & inlet-outlet cap – NAH773
- Ø 100 Vertical and lateral outlets - STCAN
- Ø 110 Vertical and lateral outlets - SVCAN



CARACTERISTICS :

Class of resistance: A15
 Drainage surface : 260 cm²/ml
 Opening dimension: 10 x 80 mm
 Effective width : 98 mm
 Effective depth : 34 mm
 Weight: 2.655 Kg

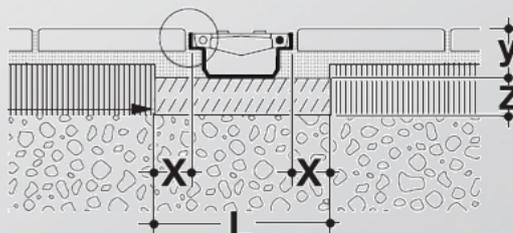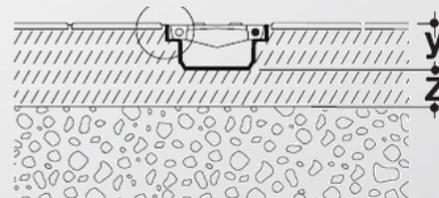

IMPLEMENTATION :

Concrete quality: B20
 X = 50 mm; L = 230 mm; Z = 50 mm;
 y = 65 mm

QUALITY - ENVIRONMENT :



January 2014